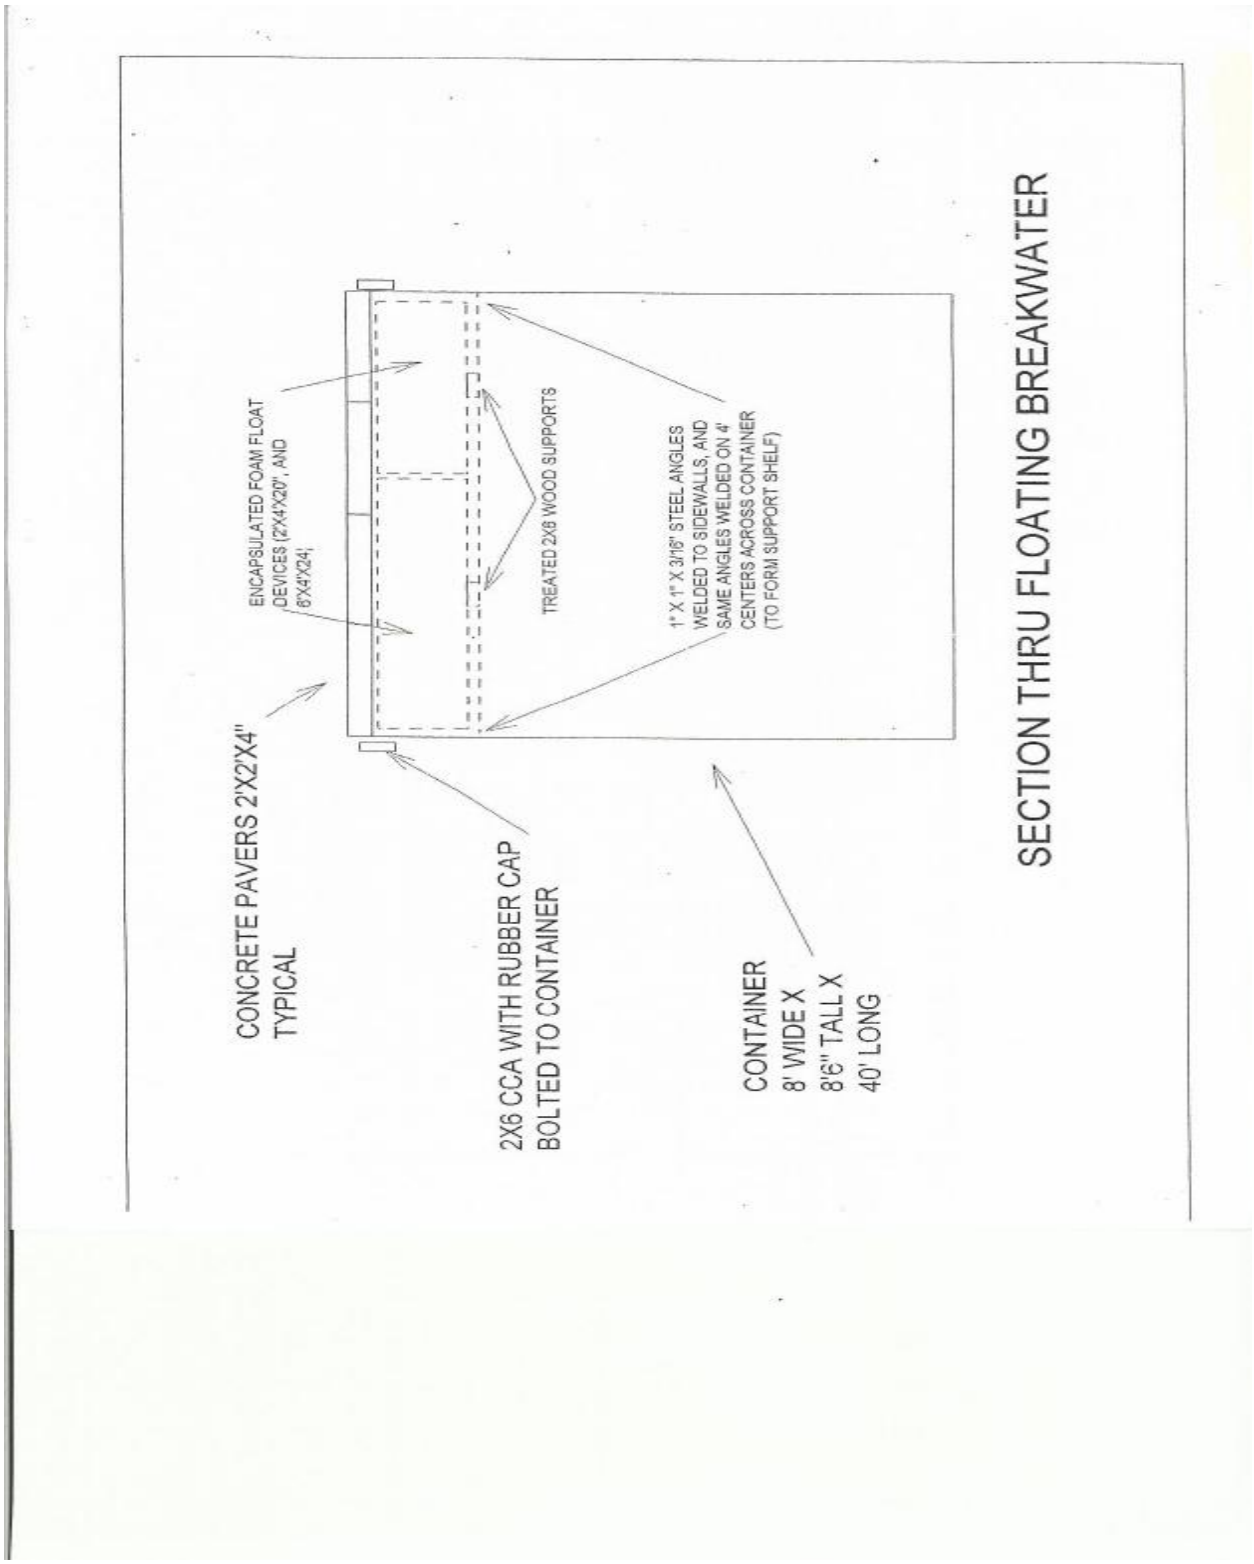
CONCRETE PAVERS 2'X2'X4"
TYPICAL
ENCAPSULATED FOAM FLOAT
DEVICES (2'X4'X20", AND
6"X4'X24)
2X6 CCA WITH RUBBER CAP
BOLTED TO CONTAINER
TREATED 2X8 WOOD SUPPORTS
1" X 1" X 3/16" STEEL ANGLES
WELDED TO SIDEWALLS, AND
SAME ANGLES WELDED ON 4'
CENTERS ACROSS CONTAINER
(TO FORM SUPPORT SHELF)
CONTAINER
8' WIDE X
8'6" TALL X
40' LONG
SECTION THRU FLOATING BREAKWATER

Figure 5