Collier County
Growth Management Department
Transportation Engineering Division

Eleven Bridge Replacements Project 60 Percent Design Plans Public Information Meeting

Meeting Date: **Wednesday, July 24, 2019, 6-8 p.m.**

Meeting Location: **UF/IFAS Extension Office (Multi-purpose Room), 14700 Immokalee Road, Naples, Florida 34120**

- ✓ Learn more about the eleven future bridge replacements east of Immokalee and State Road 29: six bridges on Immokalee Road; one on County Line Road; and four on Oil Well Road. These existing timber foundation bridges constructed in the late 1940's and early 50's have been assessed as being functionally obsolete by the Florida Department of Transportation, and due to the continued deterioration of the timber pile foundations are now all in need of replacement.

- ✓ The meeting is open to the public and will be held in an informal open house format. During the meeting, representatives from the Collier County Growth Management Department Transportation Engineering Division and its design consultant will be available to talk one-on-one about the project, including estimated construction timing. There will **not** be a formal presentation, and all members of the public are welcome to stop in between the hours of 6 to 8 p.m.

- ✓ Displays of the project will be available to view.

- ✓ This is a great opportunity to ask questions and provide comments on the project.

- ✓ Please share this meeting notice with anyone you know who may be interested in attending and providing comments.

For More Information Contact: Community Liaison Connie Deane at connie.deane@colliercountyfl.gov or 239-252-8192 or Collier County Principal Project Manager Marlene Messam, P.E. at marlene.messam@colliercountyfl.gov or 239-252-8192. Meeting display boards and handout will be posted at the following web address after the meeting: www.colliercountyfl.gov/transportationprojects. Please send any project comments to: TECM@colliercountyfl.gov.

Two or more members of the Board of County Commissioners (BCC) may be present and participate at this public information meeting. The subject matter of this meeting may be an item for discussion and action at a future BCC meeting.

Anyone who requires an auxiliary aid or service for effective communication, or other reasonable accommodations to participate in this proceeding, should contact the Collier County Facilities Management Division located at 3335 Tamiami Trail E., Naples, Florida 34112, or 239-252-8380 as soon as possible. Such reasonable accommodations will be provided at no cost to the individual.

Eleven Bridge Replacements Project 60 Percent Design Plans

Proposed Bridge Typical Sections and Maintenance of Traffic During Construction
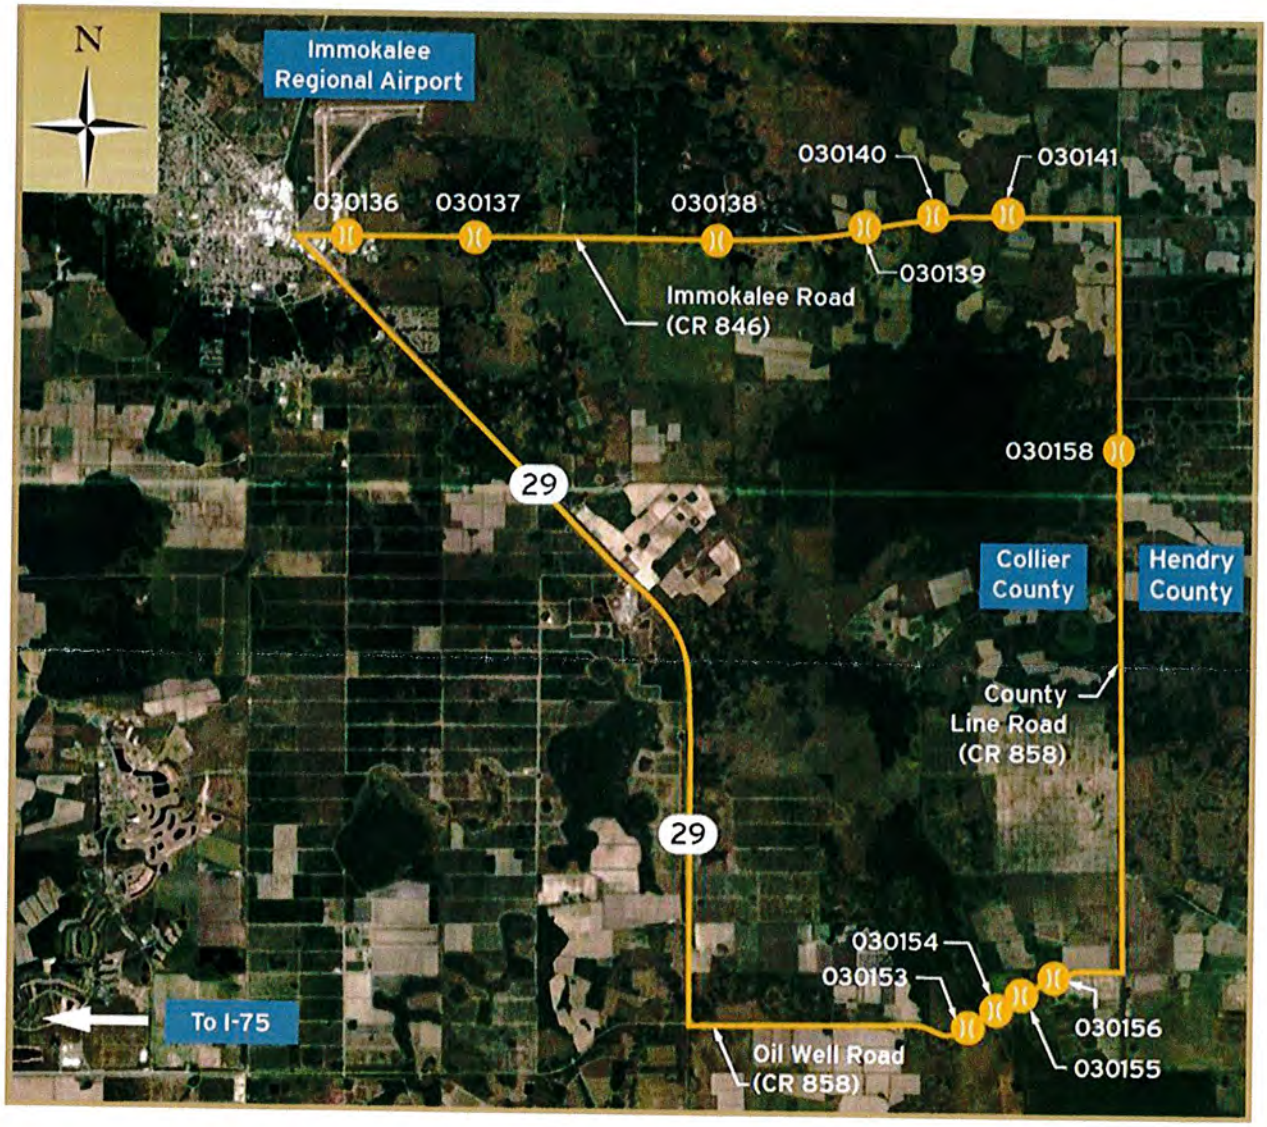
- Bridge No. 030136 east of the Immokalee Regional Airport entrance will be replaced by a bridge that includes two 12-foot travel lanes, a 12-foot center turn lane, 8-foot shoulders, and 6-foot sidewalks.
- The remaining bridges on Immokalee, Oil Well and County Line Roads will include two 12-foot travel lanes and 8-foot shoulders.
- **There are no planned detours or closures of roads or bridges during construction.**
- Two-lane roads will be reduced to a single travel lane within the construction limits. Two-way traffic will be regulated in work zones by temporary traffic signals, flaggers, and signage during construction. Nightly closures may be necessary at driveways and will be coordinated with the affected property owners.
- Outside the construction limits, traffic will resume the use of both existing travel lanes.